

## **NEC MEDIA PLAYER**

ORDER CODE: Slot-In Version 100012498 External Version 100012261

**DS Content Management Solution** 

The easy and cost-efficient way to feed powerful video and audio content to NEC public displays.



EXTERNAL OR SLOT-IN VERSION

## DELIVERING GENUINE BENEFITS

**Complete** Digital Signage Solution comprising of hard and software.


Scalable Supports up to 20 players controlled through network or USB.

**Easy to use** User friendly and intuitive user interface.


Performance Very powerful hardware player to support 1080p content + ticker.

**External Version** Any display device with a DVI input.

Slot-in Version NEC MultiSync® P401, P461, P521, P701, X461UN, X461HB, MULTEOS M401, M461.

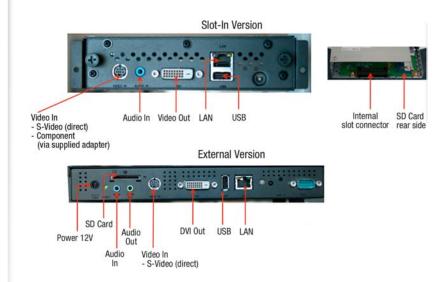

**NEC Information:** Call: +49 (0)89/99 699-0 Email: infomail@nec-displays.com



MEDIA PLAYER SOLUTION

- INSTALLATION First you have to install the Authoring Software on the computer you will use to create and manage your content. In a simple way, you will be able to setup your "panel" giving all information about IP address (Static, HDCP, offline) and create your play list and your distribution list.
- POSSIBILITY Thanks to the additional DVI Output connector
  of the Slot-In Player, you will be able to send the content
  to another screen/projector. The NEC MediaPlayer Solution
  gives you the possibility to send content up to 20 players
  using LAN network but also using an USB Stick device is LAN
  Network is not available.
- TWO VERSIONS The internal and external versions can be perfectly mixed on a same installation; this particularity gives you the opportunity to send content on all kind of NEC Display Solutions products.



**Energy Efficiency:** Very low power consumption **Ecological Materials:** Minimal use of harmful materials

JTHORING SOFTWARE	
Ticker / Program	Ticker and Video/Photo content can be created independently and combined freely
Possibilities	Create and Edit Layout Registers program in a schedule Create and Edit Schedule Distribute scheduled programs through LAN or a U stick
Format pictures	.jpg .png .mpeg .m2p .ts .wn .jpeg .bmp .mpg .m2v .vob
Format Audio	.mp3
EWER PPT CONVERTER SOFTWARE	
Source file	Microsoft PowerPoint File (.ppt)
Conversion format	.jpg, .png, .bmp
Maximum resolution	1920 x 1080 dots
EDIA PLAYER EXTERNAL	
Resolution	1920 x 1080 1280 x 1024 1680 x 1050 1360 x 768 (factory setting) 1024 x 768
Display Interface	DVI-D
Audio Output	Line out L/R x 1,3ø stereo mini plug
Video In	Mini DIN 7P connector, S-Video NTSC/PAL*
Audio In	Line out L/R x 1,3.5ø stereo mini plug
LAN terminal	RJ-45 10/100BASE-T
Input for wireless remote control extern.	2.5ø mini-jack
Other interfaces	USB memory interface, Memory card interface (SD Card 2GB Class 4, expandable by user to 8GB), Remote control
Power: AC adapter	Output + 12V, AC100-240V, 50/60Hz
Power consumption	15 W, 1 W (standy mode)
Outside dimension (H x W x D)	247.6 x 143.6 x 33.7 mm
Weight	0.9 Kg
Compatibility	All NEC MultiSync® Public Display, all NEC monitor with DVI input and NEC Projectors
EDIA PLAYER INTERNAL	
Resolution	1920 x 1080, 1360 x 768
Display Interface	Internal DVI-D, 2nd DVI-Out to drive a second display
Audio Output	Through internal connector to display amplifier and audio-out ports
Video In	S-Video: NTSC/PAL, Component 1080i, 720p: 60H 480p, 480i: 60Hz, 575p, 575i: 50Hz (via supplied adapter)
Audio In	3.5 mm jack, stereo
LAN terminal	RJ-45 10/100BASE-T
Other interfaces	USB memory interface, Memory card interface (SD Card 2GB, expandable by user to 8GB), Remote control with display remote controller
Power consumption	12 W, 11 W standby (total including display 35 W)
Outside dimension (H x W x D)	40.5 x 175 x 292.7 mm
Weight	1 Kg
Compatibility	NEC MultiSync® P401, P461, P521, P701, X461UN X461HB, MULTEOS M401, M461
JTHORING SOFTWARE SPECIFICATIONS	
CPU	Intel Pentium 3 1.0 GHz or higher is recommended
Memory	256MB or more
Resolution	1024 x 768, 65.536 colours or more
Supported OS	Microsoft Windows Vista Ultimate, Microsoft Windows X Professional, Microsoft Windows Vista Business, Micros Windows XP Home Edition, Windows 7 & Ultimate
Other	Visual C++2005 SP1 Rutime Module for Windows XP, Microsoft .NET Framework Version 2.0 or 3.5 Windows® Media Player 9 or later

