


Uniko L

Indoor LED poster
2.9 mm pixel pitch




- One-person easy-handling for setup
- Vertical & Horizontal installation
- Ultra-slim and light weight
- Just Plug & Play
- Wi-Fi easy connection
- IOS & Android dedicated app

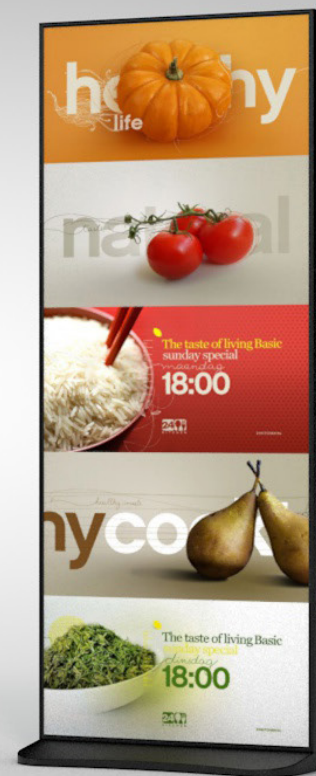

Indoor LED advertising totem

A smart solution for commercial signs.

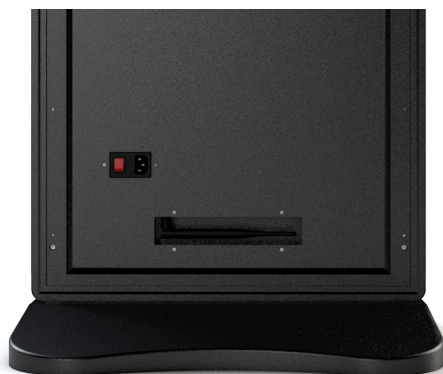

wi-fi connection

Main performance

Thin lightweight and effective. A communication world in only 35 kg; real-time messages and graphics editing thanks to an easy and intuitive dedicated IOS and Android app.
Just plug and PLAY!

Mechanical quality

- Lightness
- Easy to install
- Vertical and horizontal installation

European certification
standards guaranteed



RoHS LVD



DATA PARAMETER

| | UK-2.9L |
|--------------------------------|-----------------------------------|
| Pixel pitch (mm) | 2.9mm |
| LED Type SMD 3in1 | SMD2020 |
| Pixel m2 | 112.896 |
| Unit dimension (mm) WxHxD | 840x2150x80 |
| Screen dimension mm | 760x1904 |
| Screen Resolution (pixels) | 256x640 |
| Unit weight (Kg) | 35 |
| Refresh Rate (Hz) | 1200 - 2400 |
| Signal Processing | 14 - 16 bit |
| Colour Range | 281 Trillion Colours |
| Luminance uniformity | ≥ 97% |
| Colour Temperature | 3500K - 9500K ±500 |
| Contrast ratio | 2500:1 |
| Horizontal Viewing Angle (Deg) | 130 |
| Vertical Viewing Angle (Deg) | 130 |
| Brightness (cd/ m2) | 1200 |
| Power Cons. Max | 780 |
| Power Cons. AWG | 320 |
| Operating temperature (C°) | -20 to 60 |
| Ambience humidity | 90% at 25C° |
| IP Protection Front / Back | IP32 / IP32 |
| Lifetime (60% Brightness) | 100.000 h |
| MTBF | ≥ 10.000 hours |
| Data Transfer Method | RJ45 max 70m - Optical Fiber >70m |
| Power Supply | AC 220-240 V, 50/60 Hz |
| Certifications | CE - LVD - EMC - RoHS |

